


HFS-4/2150

2150 MHz 90 dB EMI Satellite Splitters

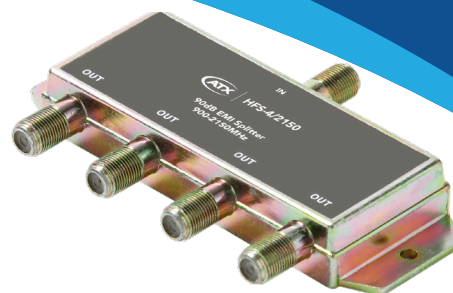

HFS-4/2150
(front view)

Features

- High-frequency range 900~2150MHz L-Band suitable for analog and digital satellite applications
- HFS series provide DC power passage to one port while blocking DC power to all other ports for improved hum modulation and Intermodulation performance. HFS-P series provide DC power passage to all ports for remote LNB-powering applications and powering the antenna preamplifier directly from the headend
- High-performance printed board circuitry provides improved hum modulation and intermodulation parameters to ensure superior signal quality
- Yellow-chromate plated zinc-alloy diecast housing ensures excellent ground bonding and long corrosion-free service life in indoor/outdoor applications
- Epoxy-sealed back cover provides effective EMI-RFI shielding >-70dB, eliminating signal ingress to provide distortion-free pictures
- 1-inch centered 3/8" long precision machined F-connector threads ensure improved port-to-connector interface and accommodate external security devices

Specifications

	900MHz	1150MHz	1350MHz	1550MHz	1750MHz	2150MHz
HFS-4/2150 INSERTION LOSS (MAX. DB)	6.8	7.1	7.7	8.0	8.0	9.4
ALL MODELS ISOLATION (MIN. DB)	20	20	20	20	20	20
ALL MODELS INPUT RETURN LOSS (MIN. DB)	12	12	12	14	12	12
ALL MODELS OUTPUT RETURN LOSS (MIN. DB)	12	12	12	14	12	12

Ordering Information

Part Number	Description
HFS-2/2150	2-Port Splitter (1 Port Power Passing)
HFS-2P/2150	2-Port Splitter (All-Port Power Passing)
HFS-4/2150	4-Port Splitter (1 Port Power Passing)
HFS-4P/2150	4-Port Splitter (All-Port Power Passing)

Products or features contained herein may be covered by one or more U.S. or foreign patents. Other non-ATX product and company names mentioned in this data sheet are the property of their respective companies.

© 2019 by ATX Networks Corp. and its affiliates (collectively "ATX Networks Corp."). All rights reserved. This material may not be published, broadcast, rewritten, or redistributed. Information in this document is subject to change without notice.
Rev. 10/19 (ANW1399)



ATX Networks

Tel: 289.204.7800 | Toll-Free: 866.YOUR.ATX | support@atx.com