



VMX1-1

High-Definition MPEG-2/4 QAM Set-Top Box with Verimatrix® CAS



VMX1-1
(front view)

Part of ATX's all-digital CONDOR solution, the VMX1-1 HD QAM set-top box descrambles signals from the CONDOR headend while converting digital signals to analog for display on legacy TVs. The unit is equipped with a single tuner for the recording of one TV channel & features Verimatrix® CAS for content protection. Offering HDMI™ & composite outputs, the unit provides PVR/media player capabilities, Electronic Program Guide (EPG) support & an intuitive high-definition interface for ease of use. The VMX1-1 can be deployed as a standalone solution for non-encrypted clear QAM applications.




VMX1-1 (rear view)

Features

- Decodes high-definition & standard-definition signals
- One tuner for recording one TV channel
- Decodes MPEG-2 / AVC / H.264 / MPEG-4 video
- Decodes MPEG-1 L1/2 & Dolby® AC-3
- Clear QAM & Verimatrix CAS
- Supports 64 & 256 QAM inputs
- Elegant, intuitive & simple high-definition user interface
- Auto scanning for QAM channels & programs
- Supports Electronic Program Guide (EPG)
- Multiple language support
- Firmware updates via cable TV network
- HDMI & analog composite video/audio outputs
- PVR via two external USB sticks/drives
- Coaxial SPDIF
- Universal remote control, HDMI & composite cable included

Subscriber Experience

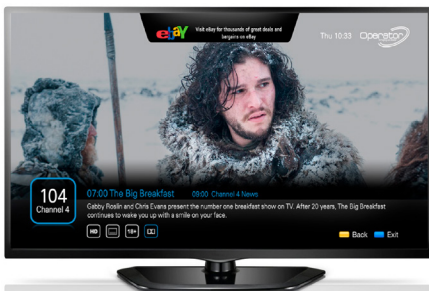


The InfoBar is similar to a traditional program Now & Next bar, which is displayed on channel change or when the user requests.



The easy-to-use program guide shows what's on TV & allows users to easily bring up detailed information about programs of interest.

Specifications

TUNER	
TUNER	Single Tuner
QAM MODES	ITU-T J.83, Annex B
CONSTELLATION	64/256 QAM
FREQUENCY RANGE	54 MHz to 862 MHz
BANDWIDTH	6 MHz
INPUT IMPEDANCE	75 Ω
INPUT LEVEL RANGE	-15 dBmV to 30 dBmV
SIGNAL INPUT	IEC 169-24, F-Type, Female
SYMBOL RATE	3.6 MS/s to 6.952 MS/s
LOOP OUTPUT	IEC 169-24, F-Type, Female
VIDEO	
MPEG DECODER	MPEG-2/MPEG-4/H.264
VIDEO RESOLUTION	1920 x 1080i, 1280 x 720p, 720 x 576i
ASPECT RATIO	4:3, 16:9
AUDIO	
MPEG DECODER	MPEG-1 L1/2 & Dolby AC-3
OUTPUT	Stereo/Right/Left/Mono
SAMPLING FREQUENCY	32 kHz, 44.1 kHz, 48 kHz
SECURITY	
CONDITIONAL ACCESS	Verimatrix
FRONT PANEL	
KEY	Up, Down, Left, Right, Ok, Menu, Exit, Standby
LED	Red: Power/Standby, Green: Signal
DIGITAL	4-digits, 7-segment Display (Green)
CA CARD	One-slot
USB	USB 2.0

REAR PANEL	
RF INPUT	F-Type
RF LOOP THROUGH	F-Type
COMPOSITE OUTPUT	3 RCA (CVBS, A. Left, A. Right)
DIGITAL AUDIO	S/PDIF
ETHERNET	RJ45
HDMI	19-pin Female
USB	USB 2.0
DC INPUT	12V/1.5A
REMOTE CONTROL	
BATTERIES	2 AAA Type
POWER SUPPLY	
POWER SUPPLY MODE	External
PLUG TYPE	American Standard
AC INPUT (V/Hz)	AC 110V to 240V, 50/60 Hz
OUTPUT VOLTAGE (V)	12V
GENERAL	
OPERATING TEMPERATURE	0°C to +40°C (+32°F to +104°F)
CONSUMPTION	18W Max.
STANDBY CONSUMPTION	1W
DIMENSIONS	1.75"H x 8.70"W x 6.38"D (4.45H x 22.10W x 16.21D cm)
WEIGHT	4.0 lbs (1.81 kg)
RoHs COMPLIANT	

Ordering Information

Part Number	Description
VMX1-1	High-Definition MPEG-2/4 QAM Set-Top Box with Verimatrix CAS
IR-EXT	3.5mm IR Extender

Products or features contained herein may be covered by one or more U.S. or foreign patents. Verimatrix®, Dolby®, HDMI™ and other non-ATX product and company names mentioned in this data sheet are the property of their respective companies.

© 2019 by ATX Networks Corp. and its affiliates (collectively "ATX Networks Corp."). All rights reserved. This material may not be published, broadcast, rewritten, or redistributed. Information in this document is subject to change without notice. Rev. 11/19 (ANW1278)



ATX Networks

Tel: 289.204.7800 | Toll-Free: 866.YOUR.ATX | support@atx.com