

SHRINKS
WHEN EXPOSED TO AIR™
HEAT
IS REQUIRED

Connector

Protection

Products

PolyChem™

Shrink

PolyFlex SFT-150™

Self-Fusing

Tape

PolyChem™ Shrink

Flexible EPDM Rubber
Shrink Tubing for all
CATV Connections



Features:

- ▶ Easy installation and re-entry
- ▶ No heat, flame or tools required
- ▶ No craftsmanship required to shrink
- ▶ Eliminates safety hazard with heat or open flame
- ▶ Maximum moisture protection
- ▶ Excellent U.V. and ozone resistance
- ▶ Environmental temperature range -67°F to +302°F
-55°C to +150°C

How to Order

Trunk & Feeder (Hardline)

Example: PCSE-500-P-G-4

Cable Size Quantity per Pouch
Connector Type Connector Manufacturer

Type: P = Pin or Feed Through
US = Underground Splice
S = Splice

Manufacturer: G = Gilbert
L2 = LRC (2 pc.)
L3 = LRC (3 pc.)
PP = PPC
CC = Cablecon

Standard Color: Black

"F" Connectors

Part Number	Application	Quantity
PCS-RG59/6	"F" Boot RG59 or 6	4, 10, 20
PCS-RG59/6S	"F" Splice RG59 or 6	2, 4, 6
PCS-RG11	"F" Boot RG11	2, 4, 10
PCS-RG11S	"F" Splice RG11	2, 4, 6
PCS-RG7/611	"F" Boot RG7 or 611	2, 4, 10
PCS-RG7/611S	"F" Splice RG7 or 611	2, 4, 6
PCS-CAP-RG59/6	Disconnect Cap RG59/6	4, 10, 20
PCS-CLEAR-RG59/6	Clear I.D. Sleeve	4, 10, 20

Example: PCS-RG59/6-20 (RG59/6 Boot 20 pieces per pouch)

Standard Colors: Black for "F" Boots & Splices, Red for Disconnect Caps
Other colors, sizes and lengths available.

Total mois
seal to sav
during dis
colors for

Consistent Shrink
every time without
heat or flame.

Typical Physical Properties...



Properties	Value	Test Methods
Tensile Strength	1800 psi	ASTM D-412
Elongation	400%	ASTM D-412
Durometer	60 Shore A	ASTM D-2240
Specific Gravity	1.35	ASTM D-792
Heat Aging	90% Ret.	168 Hrs. @ 136 °C
Water Absorption	<.05%	ASTM D-570
Service Temp. Range	-55°C to +150°C -67°F to +302 °F	MS-202C
Dielectric Strength	800 V/MIL	ASTM D-876

The above data represents average test results only.

Should not be used for specification purposes.

Patents applied for.



Maximum moisture
protection for all
"F" fittings. Reduces
costly service calls.



-proof
nector
nect. Bright
tification.

PolyFlex™ SFT-150


Self-Fusing Tape

PolyFlexSFT-150 is designed to provide maximum moisture and corrosion protection for all CATV outside plant connections.

SFT-150 is a tough, self-fusing EPR-based tape. It is easy to install and requires no heat or open flame.



It is the perfect product for housing to housing or re-entry protection without interrupting service, as well as providing an excellent jacket repair system.

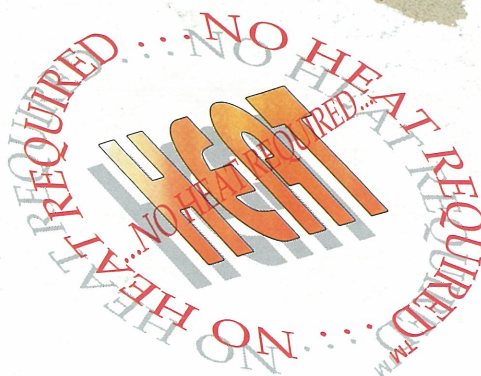

Features:

- ▶ Easy Installation and Removal
- ▶ No Heat/Flame Required
- ▶ Excellent Ozone Resistance
- ▶ Superior Low Temp Flexibility -55 F

How to Order

Part #: PolyFlex SFT-150

Roll Size: 1.5" x 15'

Packaging: 12 Rolls/Case

For
More
Information



Customer Service
CONTECH SYSTEMS, INC.
P.O. Box 1628
San Marcos, CA 92079-1628

Tel: (760) 471-1696
(800) 816-1696
Fax: (760) 471-2763

E-mail:
custserv@contechsystems.net