

# Contech SFT-150

## Self-Fusing Tape

### Features:


- Easy Installation and Removal
- No Heat/Flame Required
- Excellent Ozone Resistance
- Superior Low Temperature Flexibility -55F



Contech SFT-150 is a newly developed self fusing tape combining the benefits of all tapes presently marketed, it is designed to provide maximum moisture and corrosion protection for all CATV connections.

SFT-150 is a tough, self-fusing Synthetic Rubber-based tape. It is easy to install and requires no heat or open flame.

It is the perfect product for housing to housings, 90s, 180s, re-entry protection without interrupting service, as well as providing an excellent jacket repair system., it can also be used for underground construction.

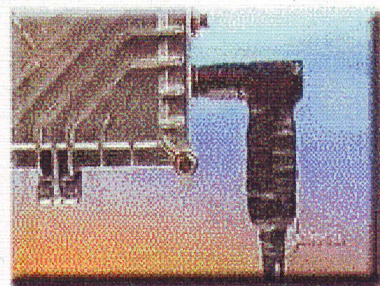

### INSTALLATION PROCEDURE

After ensuring that the installation surface is clean, separate backing from tape and stretch the tape whilst wrapping around the cable/connector. Keep the tape under tension at all times ensuring a 50% overlap. As with all tapes you should wrap firstly one way then back over itself the other way to ensure that no pin holes are left.

PROPERTIES	VALUE	TEST METHOD
Thickness	0.035"	
Width	1.5"(others available)	
Tensile Strength	200 psi	ASTM D 412
Elongation	700%	ASTM D 412
Fusion	Excellent	ASTM D 1373
Water Absorption	<.05%	ASTM D 570
Water Vapor Permeability	<.01	ASTM D 814
Water Immersion	No deterioration	ASTM D 471
Operating Temperature Continuous	-40 to +100C	ASTM D 4388
Emergency Overload	130C	ASTM D 4388
Dielectric Strength	600 vpm	ASTM D 149-64
Ozone Resistance (concentration 100 pphm ozone)	Pass	ASTM D 1149
UV Resistance	Pass	ASTM D 4325

The above data represents only average test results and are not to be used for specification purposes.